THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

LOC	DIST
ES	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	ECR-12-013436	26JUL2012	CL	AZ

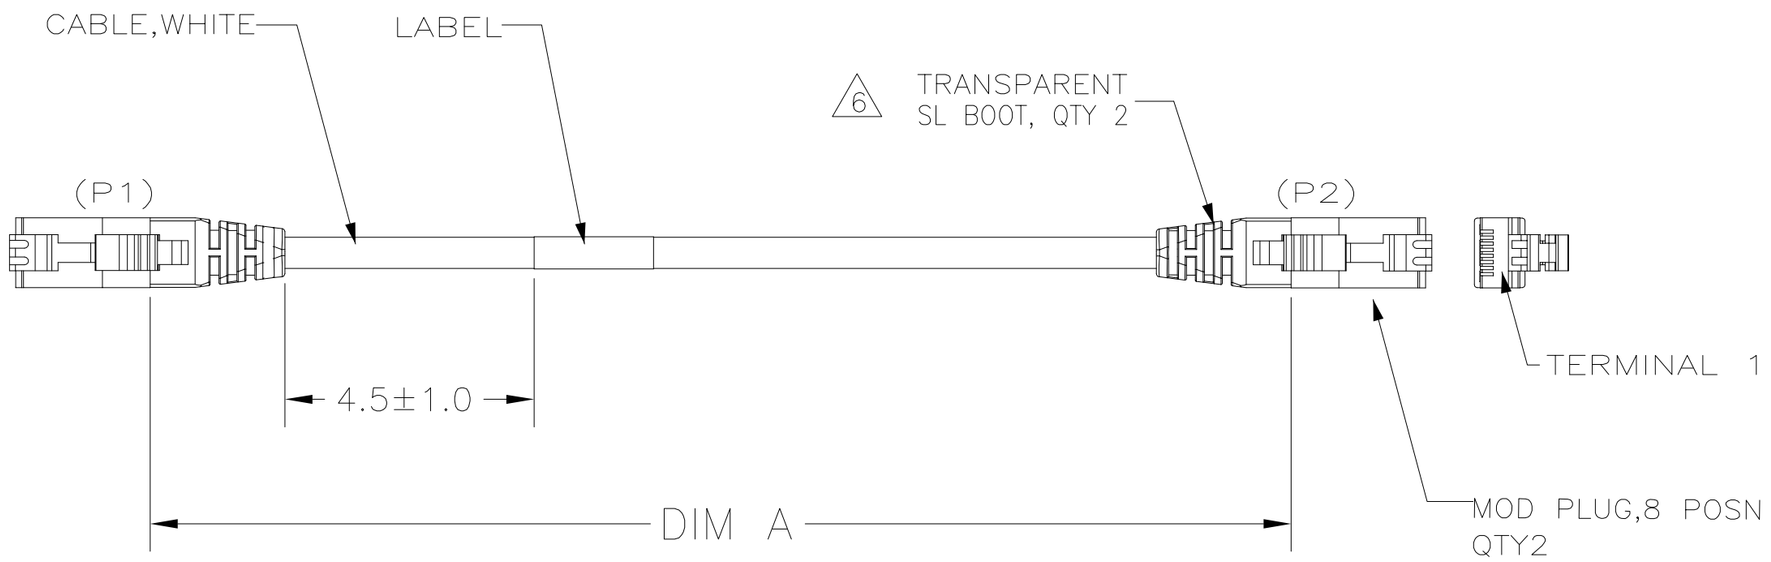

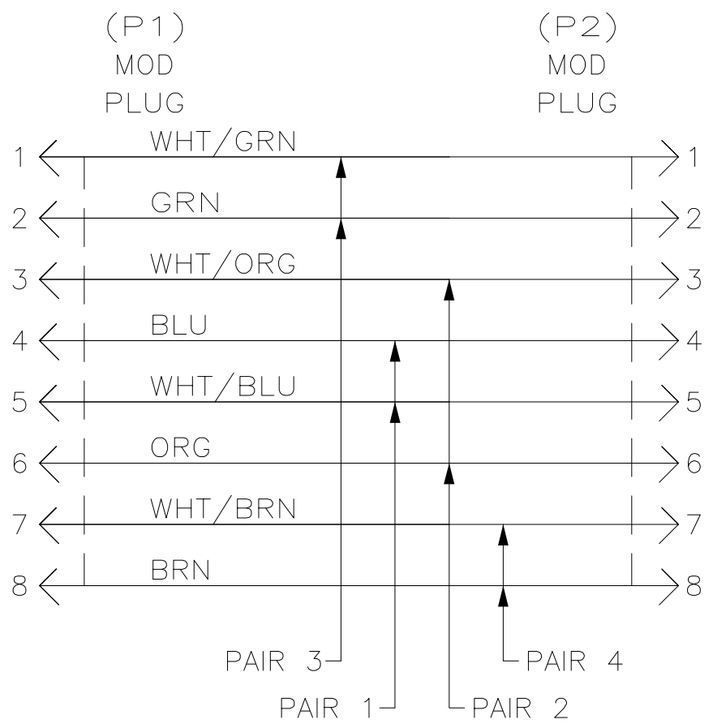

WIRING DIAGRAM 5
T568A

1. ONE CABLE ASSEMBLY PACKAGED IN A POLY BAG.
2. CABLE: UNSHIELDED, 24AWG, 4 TWISTED PAIRS 7/32 STRANDED CONDUCTORS, 100 OHMS.
3. DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
4. DESIGNATIONS IN PARENTHESES ( ) ARE FOR REFERENCE ONLY.
5. WIRES TO BE LACED IN MOD PLUG PER COLOR CODE IN WIRING DIAGRAM. FINAL ASSEMBLY WILL BE T568A.
6. USE SL BOOT 1859146-2 AND CM9614-000 LABEL FOR UL APPROVED CABLE ASSEMBLIES.

FEET,REF	DIM A	PART NO
100	1206	9-1859242-9
95	1146	9-1859242-5
90	1086	9-1859242-0
85	1026	8-1859242-5
80	966	8-1859242-0
75	906	7-1859242-5
70	846	7-1859242-0
65	786	6-1859242-5
60	726	6-1859242-0
55	666	5-1859242-5
50	606	5-1859242-0
45	546	4-1859242-5
40	486	4-1859242-0
35	426	3-1859242-5
30	366	3-1859242-0
25	304	2-1859242-5
20	244	2-1859242-0
16	196	1-1859242-6
15	184	1-1859242-5
14	172	1-1859242-4
12	148	1-1859242-2
10	124	1-1859242-0
9	110	1859242-9
8	98	1859242-8
7	86	1859242-7
6	74	1859242-6
5	62	1859242-5
4	50	1859242-4
3	38	1859242-3
2	26	1859242-2
1	14	1859242-1

1859242

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL –
FINISH –

DWN JENNY GU 08MAY2009
CHK RICKY CHEN 08MAY2009
APVD RICKY CHEN 08MAY2009
PRODUCT SPEC –
APPLICATION SPEC –
WEIGHT –

TE Connectivity

NAME CABLE ASSY, CAT5E, MOD PLUG, 8 POSN, WHITE, TRANSPARENT SL BOOT
–

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-1859242	–

CUSTOMER DRAWING | SCALE – | SHEET 1 OF 1 | REV C